

Hybrid High-Order methods for finite deformations of hyperelastic materials

Mickaël Abbas, Alexandre Ern, Nicolas Pignet

EDF R&D - IMSIA CERMICS - INRIA

ECCM 6, Glasgow, 13.06.18



- **Nonlinear** hyperelastic problem
 - measure of the deformations (geometric nonlinearity)
 - stress-strain constitutive relation (material nonlinearity)
- Presence of **volumetric-locking** with primal H^1 -conforming formulation in the incompressible limit $\lambda \rightarrow +\infty$ ($\nu \simeq 0.5$)
- An alternative : using mixed methods but more unknowns, more expensive to build, saddle-point problem to solve ...

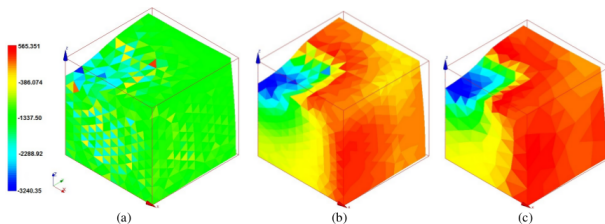


Figure 1 – Trace of the stress tensor for (a) P1 (b) P2 (c) P2/P1/P1

Some references on **primal** formulations **without** volumetric-locking

- **discontinuous Galerkin (dG)**
 - [Noels, Radovitzsky 06]
 - [ten Eyck, Lew 06]
- **Hybridizable Discontinuous Galerkin (HDG)**
 - [Nguyen, Peraire 12]
 - [Kabaria, Lew, Cockburn 15]
- **Virtual Element Method (VEM)**
 - [Chi, Beirão da Veiga, Paulino 17]
 - [Wriggers, Reddy, Rust, Hudobivnik 17]

Key ideas of Hybrid High-Order (HHO) methods

- Primal formulation with **cells** and **faces** unknowns
- **Local reconstruction and stabilization**
 - Gradient tensor field reconstructed in $\mathbb{P}_d^k(T; \mathbb{R}^{d \times d})$
 - Stabilization connecting cell and faces unknowns
- References
 - diffusion problem [Di Pietro, Ern, Lemaire, CMAM 14]
 - quasi-incompressible linear elasticity [Di Pietro, Ern, CMAME 15]
 - nonlinear elasticity with small def. [Botti, Di Pietro, Sochala, SINUM 17]




Figure 2 – Face (green) and Cell (blue) unknowns

- Support of **polytopal meshes** (with possibly nonconforming interfaces)
- **Arbitrary approximation order** $k \geq 1$
 - h^{k+1} convergence in energy-norm
 - h^{k+2} convergence in L^2 -norm with elliptic regularity
- Dimension-**independent** construction
- **Attractive** computational costs
 - Compact stencil (only neighbourhood faces)
 - Cell unknowns are eliminated locally by static condensation
 - Reduced size $N_{dofs}^{hho} \approx k^2 \text{card}(\mathcal{F}^h)$ vs. $N_{dofs}^{dG} \approx k^3 \text{card}(\mathcal{T}^h)$
- Local principle of virtual work (**equilibrated tractions**)
- HHO methods are **bridged** to HDG and ncVEM
 - [Cockburn, Di Pietro, Ern 16]

Hyperelasticity problem

- Let $\Omega_0 \in \mathbb{R}^d$ ($d=2,3$), be a bounded connected polytopal domain
- Let $\underline{\mathbf{f}}$ and $\underline{\mathbf{t}}$ be given volumetric and surface (on Γ_n) loads
- Let $\underline{\mathbf{u}}_D$ be a given imposed displacement on Γ_d
- We define the energy functional \mathcal{E} in the **reference configuration** for all $\underline{\mathbf{v}} \in V := \{ \underline{\mathbf{v}} \in H^1(\Omega_0, \mathbb{R}^d) \mid \underline{\mathbf{v}} = \underline{\mathbf{u}}_D \text{ on } \Gamma_d \}$

$$\mathcal{E}(\underline{\mathbf{v}}) := \int_{\Omega_0} \Psi(\underline{\mathbf{F}}(\underline{\mathbf{v}})) - \int_{\Omega_0} \underline{\mathbf{f}} \cdot \underline{\mathbf{v}} \, d\Omega_0 - \int_{\Gamma_n} \underline{\mathbf{t}} \cdot \underline{\mathbf{v}} \, d\Gamma.$$

with $\underline{\mathbf{F}} := \underline{\nabla}_x \underline{\mathbf{u}} + \underline{\mathbf{I}}_d$ and a **strain energy density** $\Psi : \mathbb{R}_+^{d \times d} \rightarrow \mathbb{R}$

- Example of Neoohookean strain energy density

$$\Psi(\underline{\mathbf{F}}) = \frac{\mu}{2} (\underline{\mathbf{F}} : \underline{\mathbf{F}} - d) - \mu \ln(\det \underline{\mathbf{F}}) + \frac{\lambda}{2} (\ln(\det \underline{\mathbf{F}}))^2,$$

with $\mu > 0$, $\lambda > 0$ (material constants)

- We assume that Ψ is polyconvex, i.e. existence of **local minimizers**
- Static equilibrium : **stationary point(s)** $\underline{\mathbf{u}}$ of the energy \mathcal{E}

$$D\mathcal{E}(\underline{\mathbf{u}})[\delta\underline{\mathbf{v}}] = 0, \forall \delta\underline{\mathbf{v}} \in H_0^1(\Omega_0, \mathbb{R}^d)$$

- **Weak problem** : Find $\underline{\mathbf{u}} \in V$ such that for all $\delta\underline{\mathbf{v}} \in H_0^1(\Omega_0, \mathbb{R}^d)$

$$\int_{\Omega_0} \underline{\underline{\mathbf{P}}}(\underline{\underline{\mathbf{F}}}(\underline{\mathbf{u}})) : \underline{\underline{\nabla}}_X(\delta\underline{\mathbf{v}}) d\Omega_0 = \int_{\Omega_0} \underline{\mathbf{f}} \cdot \delta\underline{\mathbf{v}} d\Omega_0 + \int_{\Gamma_n} \underline{\mathbf{t}} \cdot \delta\underline{\mathbf{v}} d\Gamma.$$

with $\underline{\underline{\mathbf{P}}} = \partial_{\underline{\underline{\mathbf{F}}}}\Psi$ the first Piola–Kirchhoff stress tensor

Local DOFs space

- Let $M^h := (\mathcal{T}^h, \mathcal{F}^h)$ be a mesh of Ω_0 with \mathcal{T}^h the set of cells and \mathcal{F}^h the set of faces
- Let a polynomial degree $k \geq 1$, for all $T \in \mathcal{T}^h$

$$(\underline{\mathbf{v}}_T, \underline{\mathbf{v}}_{\partial T}) \in \underbrace{\underline{\mathbf{U}}_T^k}_{\text{local HHO dofs}} := \underbrace{\mathbb{P}_d^k(T; \mathbb{R}^d)}_{\text{local cell dofs}} \times \underbrace{\mathbb{P}_{d-1}^k(\mathcal{F}_{\partial T}; \mathbb{R}^d)}_{\text{local faces dofs}}.$$

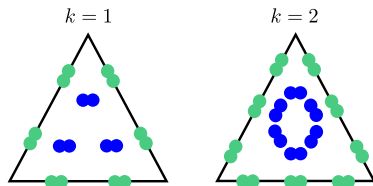


Figure 3 – Local DOFs for $k = 1, 2$. Cell unknowns eliminated by static condensation

$$\underline{\underline{\mathbf{G}}}_T^k : \underbrace{\underline{\underline{\mathbf{U}}}_T^k}_{\text{local HHO space}} \rightarrow \underbrace{\mathbb{P}_d^k(T; \mathbb{R}^{d \times d})}_{\text{local gradient space}}$$

- The reconstructed gradient $\underline{\underline{\mathbf{G}}}_T^k(\underline{\mathbf{v}}_T, \underline{\mathbf{v}}_{\partial T})$ solves, $\forall \underline{\underline{\boldsymbol{\tau}}} \in \mathbb{P}_d^k(T; \mathbb{R}^{d \times d})$

$$(\underline{\underline{\mathbf{G}}}_T^k(\underline{\mathbf{v}}_T, \underline{\mathbf{v}}_{\partial T}), \underline{\underline{\boldsymbol{\tau}}})_{\underline{\underline{\mathbb{L}}}_T^2(T)} = (\underline{\nabla}_X \underline{\mathbf{v}}_T, \underline{\underline{\boldsymbol{\tau}}})_{\underline{\underline{\mathbb{L}}}_T^2(T)} + (\underline{\mathbf{v}}_{\partial T} - \underline{\mathbf{v}}_T, \underline{\underline{\boldsymbol{\tau}}} \underline{\mathbf{n}}_T)_{\underline{\underline{\mathbb{L}}}_T^2(\partial T)}.$$

- local **scalar** mass-matrix of size $\binom{k+d}{k}$ to invert (ex : $k = 2, d = 3, \text{size} = 10$)
- We define $\underline{\underline{\mathbf{F}}}_T^k(\underline{\mathbf{v}}_T, \underline{\mathbf{v}}_{\partial T}) := \underline{\underline{\mathbf{G}}}_T^k(\underline{\mathbf{v}}_T, \underline{\mathbf{v}}_{\partial T}) + \underline{\underline{\mathbf{I}}}_d \in \mathbb{P}_d^k(T; \mathbb{R}^{d \times d})$
- Local discrete counterpart $\mathcal{E}_T^{\text{mech}} : \underline{\underline{\mathbf{U}}}_T^k \rightarrow \mathbb{R}$ of the energy \mathcal{E}

$$\mathcal{E}_T^{\text{mech}}(\underline{\mathbf{v}}_T, \underline{\mathbf{v}}_{\partial T}) = \int_T \left\{ \Psi(\underline{\underline{\mathbf{F}}}_T^k(\underline{\mathbf{v}}_T, \underline{\mathbf{v}}_{\partial T})) - \underline{\mathbf{f}} \cdot \underline{\mathbf{v}}_T \right\} dT - \int_{\partial T \cap \mathcal{F}_{b,n}^h} \underline{\mathbf{t}} \cdot \underline{\mathbf{v}}_{\partial T} d\partial T$$

Stabilization operator

- **Problem** : $\underline{\mathbf{G}}_T^k(\underline{\mathbf{v}}_T, \underline{\mathbf{v}}_{\partial T}) = \underline{\mathbf{0}} \not\Rightarrow \underline{\mathbf{v}}_T = \underline{\mathbf{v}}_{\partial T} = \text{cste}$
 - \Rightarrow We have to add a **stabilization term**
- Hence, we penalize the **difference between the faces unknowns and the trace of the cell unknowns** : $\underline{\boldsymbol{\theta}} := \underline{\mathbf{v}}_{\partial T} - \underline{\mathbf{v}}_T|_{\partial T} \in \mathbb{P}_{d-1}^k(\mathcal{F}_{\partial T}; \mathbb{R}^d)$,

$$\underline{\mathbf{S}}_{\partial T}^k(\underline{\boldsymbol{\theta}}) = \underline{\boldsymbol{\Pi}}_{\partial T}^k(\underline{\boldsymbol{\theta}} - (\underline{\mathbf{I}}_d - \underline{\boldsymbol{\Pi}}_T^k)\underline{\mathbf{D}}_T^{k+1}(\underline{\mathbf{0}}, \underline{\boldsymbol{\theta}}))$$

where $\underline{\boldsymbol{\Pi}}_{\partial T}^k$ is the L^2 -projector on ∂T , $\underline{\boldsymbol{\Pi}}_T^k$ the L^2 -projector on T , and $\underline{\mathbf{D}}_T^{k+1}$ is a reconstructed displacement field

- We define the local stabilization energy $\mathcal{E}_T^{stab} : \underline{\mathbf{U}}_T^k \rightarrow \mathbb{R}$

$$\mathcal{E}_T^{stab}(\underline{\mathbf{v}}_T, \underline{\mathbf{v}}_{\partial T}) = \frac{h_T^{-1}}{2} \|\underline{\mathbf{S}}_{\partial T}^k(\underline{\mathbf{v}}_{\partial T} - \underline{\mathbf{v}}_T|_{\partial T})\|_{\underline{\mathbf{L}}^2(\partial T)}^2$$

Global DOFs space and discrete energy

- We define the global space by patching the interface DOFs

$$(\underline{\mathbf{v}}_{\mathcal{T}^h}, \underline{\mathbf{v}}_{\mathcal{F}^h}) \in \underbrace{\underline{\mathbf{U}}_h^k}_{\text{global HHO dofs}} := \underbrace{\left\{ \prod_{T \in \mathcal{T}^h} \mathbb{P}_d^k(T; \mathbb{R}^d) \right\}}_{\text{global cells dofs}} \times \underbrace{\left\{ \prod_{F \in \mathcal{F}^h} \mathbb{P}_{d-1}^k(F; \mathbb{R}^d) \right\}}_{\text{global faces dofs}}$$

and its subspaces $\underline{\mathbf{U}}_{h,d}^k$ and $\underline{\mathbf{U}}_{h,0}^k$ by imposing **strongly** the BC on Γ_d .

- We define the global discrete energy $\mathcal{E}_h : \underline{\mathbf{U}}_h^k \rightarrow \mathbb{R}$

$$\underbrace{\mathcal{E}_h(\underline{\mathbf{v}}_{\mathcal{T}^h}, \underline{\mathbf{v}}_{\mathcal{F}^h})}_{\text{global discrete energy}} = \underbrace{\sum_{T \in \mathcal{T}^h} \mathcal{E}_T^{\text{mech}}(\underline{\mathbf{v}}_T, \underline{\mathbf{v}}_{\partial T})}_{\text{global mech. discrete energy}} + \underbrace{\sum_{T \in \mathcal{T}^h} \beta \mathcal{E}_T^{\text{stab}}(\underline{\mathbf{v}}_T, \underline{\mathbf{v}}_{\partial T})}_{\text{global stabilization energy}}$$

with β an user-dependent stabilization parameter (can be hard to choose)

- We search the **stationary point(s)** of \mathcal{E}_h

$$D\mathcal{E}_h(\underline{\mathbf{u}}_{\mathcal{T}^h}, \underline{\mathbf{u}}_{\mathcal{F}^h})[(\delta \underline{\mathbf{v}}_{\mathcal{T}^h}, \delta \underline{\mathbf{v}}_{\mathcal{F}^h})] = 0, \forall (\delta \underline{\mathbf{v}}_{\mathcal{T}^h}, \delta \underline{\mathbf{v}}_{\mathcal{F}^h}) \in \underline{\mathbf{U}}_{h,0}^k$$

- Find $(\underline{\mathbf{u}}_{\mathcal{T}^h}, \underline{\mathbf{u}}_{\mathcal{F}^h}) \in \underline{\mathbf{U}}_{h,d}^k$ such that

$$\begin{aligned} & \sum_{T \in \mathcal{T}^h} (\underline{\mathbf{P}}(\underline{\mathbf{F}}_T^k(\underline{\mathbf{u}}_T, \underline{\mathbf{u}}_{\partial T}), \underline{\mathbf{G}}_T^k(\delta \underline{\mathbf{v}}_T, \delta \underline{\mathbf{v}}_{\partial T})) \underline{\underline{\mathbf{L}}}(T)) \\ & + \sum_{T \in \mathcal{T}^h} \beta h_T^{-1} (\underline{\mathbf{S}}_{\partial T}^k(\underline{\mathbf{u}}_{\partial T} - \underline{\mathbf{u}}_{T|\partial T}), \underline{\mathbf{S}}_{\partial T}^k(\delta \underline{\mathbf{v}}_{\partial T} - \delta \underline{\mathbf{v}}_{T|\partial T})) \underline{\underline{\mathbf{L}}}(\partial T) \\ & = \sum_{T \in \mathcal{T}^h} (\underline{\mathbf{f}}, \delta \underline{\mathbf{v}}_T) \underline{\underline{\mathbf{L}}}(T) + \sum_{F \in \mathcal{F}_{b,n}^h} (\underline{\mathbf{t}}, \delta \underline{\mathbf{v}}_F) \underline{\underline{\mathbf{L}}}(F), \quad \forall (\delta \underline{\mathbf{v}}_{\mathcal{T}^h}, \delta \underline{\mathbf{v}}_{\mathcal{F}^h}) \in \underline{\mathbf{U}}_{h,0}^k \end{aligned}$$

Numerical examples

- **Nonlinear** problem to solve (geometric and material nonlinearities)
 - Iterative resolution with a **Newton method** (SPD global system)
 - Static condensation performed at **each Newton's iteration**
 - **Offline** computations (gradient and stabilization operators precomputed)
 - Implementation in the open-source library *disk++*
-
- Verification on analytical solutions :
 - **Expected** convergence rates (h^{k+1} in energy-norm and h^{k+2} in L^2 -norm)
 - **Absence of volumetric-locking** in the quasi-incompressible regime
 - Tested on more challenging 3D test cases (see [Kabaria, Lew, Cockburn 15])

Quasi-incompressible annulus I

- Analytical solution
- Imposed radial displacement on the inner circumference



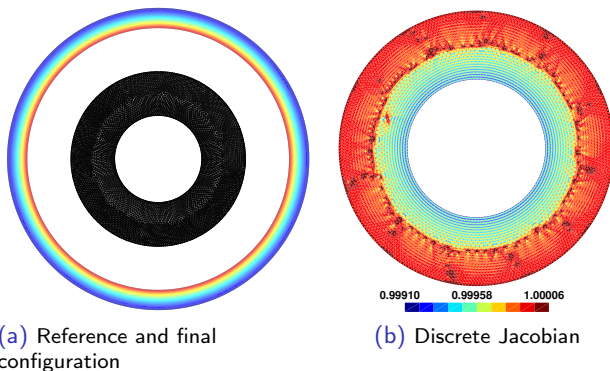


Figure 4 – Solution for $k = 1$ and $\nu = 0.4999$

Quasi-incompressible annulus II

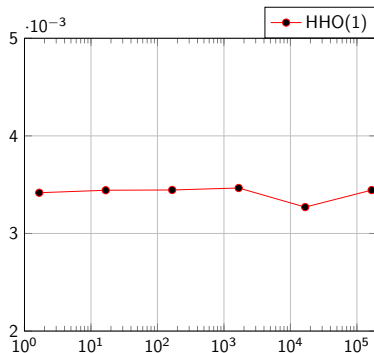

(a) Displacement error

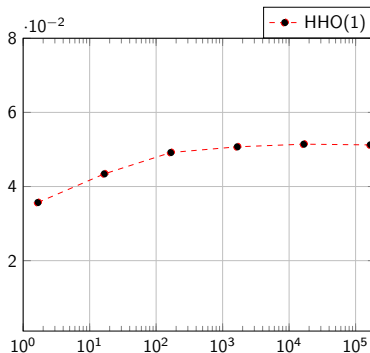

(b) Gradient error

Figure 5 – errors vs. λ on a fixed mesh

- The errors do not depend on λ
 \Rightarrow HHO methods are **robust** in the incompressible limit

Sheared and compressed cylinder ($\nu = 0.45$)

- The bottom face is clamped
- Imposed vertical and horizontal displacement on the top face

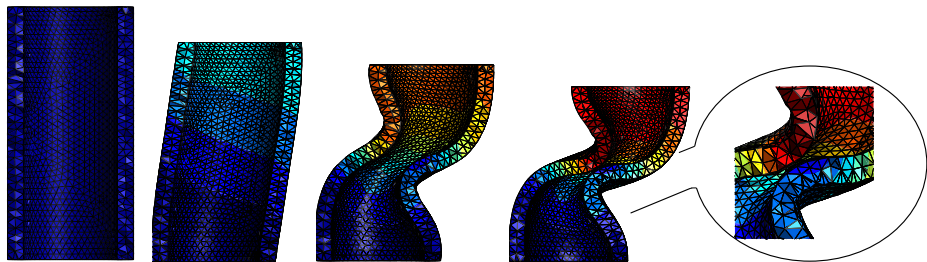


Figure 6 – Snapshots of the displacement at 0%, 40%, 80% and 100% of loading

Sphere with cavitating voids

- Growth of internal cavities under large tensile stresses
- Conforming FEM are not really robust
- Imposed radial displacement on the outer surface
- We stop when the Newton's method fails to converge

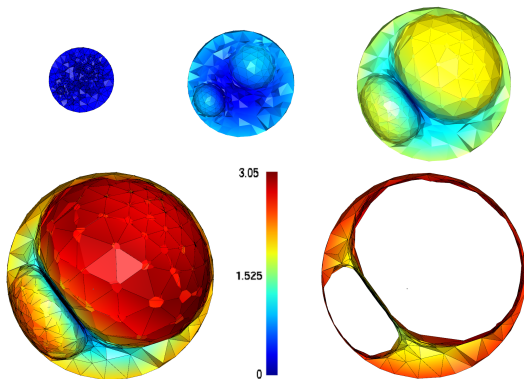


Figure 7 – Displacement for $k = 2$ at the different steps (around 250% of deformations)

Variant of HHO methods on simplicial meshes

- Original idea for dG : [John, Neilan, Smears 16]
 - Based on the properties of the **Raviart–Thomas space**
- Gradient reconstruction in $\mathbb{P}_d^{k+1}(T; \mathbb{R}^{d \times d})$ (larger space)
 - ex : $k = 2, d = 3$, size = 20 for $\mathbb{P}_d^{k+1}(T; \mathbb{R}^{d \times d})$ vs 10 for $\mathbb{P}_d^k(T; \mathbb{V}^{d \times d})$
- **No additional** stabilization is needed
- **Lower** convergence rates (h^k in energy-norm and h^{k+1} in L^2 -norm)
- **Comparable** numerical cost vs. stabilized HHO (sHHO) methods
- **Better** results for the cavitation problem ($r_{max} = 2.52$ vs. $r_{max}^{sHHO} = 2.13$)

- Conclusion :
 - Adaptation of HHO methods to hyperelastic material with **finite deformations**
 - **Absence** of volumetric-locking
 - Variant of HHO method **without stabilization**
- Perspectives of this work :
 - Extension to finite plasticity
 - Introduction of contact and friction
 - Implementation in `code_aster` (in progress)



Thank you for your attention

email : nicolas.pignet@enpc.fr

code : <https://github.com/datafl4sh/diskpp>

Reference : M. Abbas, A. Ern and NP, "Hybrid High-Order methods for finite deformations of hyperelastic materials", Comput. Mech. (2018)